REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

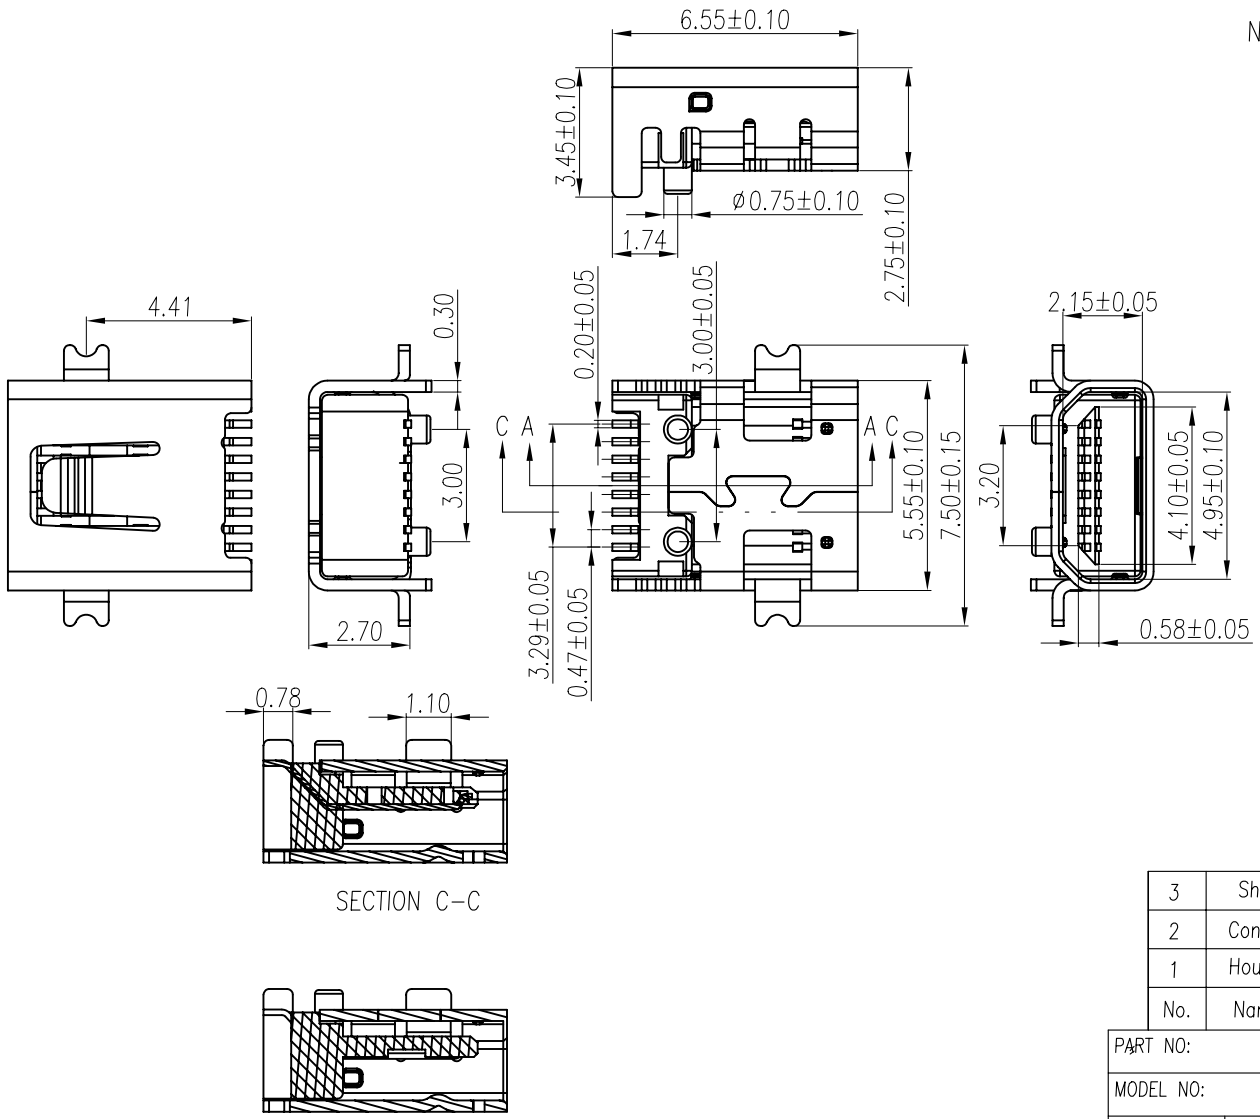

Note:

1.Material:

1.1 Insulator: L.C.P UL 94-V0 rated.
1.2 Contact: Phosphor bronze T=0.15mm
1.3 Shell: Brass T=0.30mm

2.Specification:

2.1 Current rating: 1 A Max.
2.2 Dielectric withstanding voltage: 500 V(ac) or 1 minute.
2.3 Contact resistance: 30 mΩ Max.
2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
2.5 Temperature range: -55°C~+105°C

3.Finishes:

3.1 Contacts:Gold flashed 3u",10u"
3.2 Shell:All gold plated 1u",3u",10u".

No.	Name	Q'ty	Material	Remarks & Thickness	Finish
3	Shell	1	Brass	T=0.30mm	All gold plated
2	Contact	8	Phosphor bronze	T=0.15mm	Gold Flashed
1	Housing	1	L.C.P	UL 94-V0	Black

PART NO:		MATERIAL:	
MODEL NO:		FINSH:	
UNIT: mm	SIZE: A4	COLOR:	PART NAME: MINI USB-8S S.M.T單排
TOLERANCE UNSPECIFIED .x ±0.20 .xx ±0.10 .xxx ±0.05 ANG. ±1°		DR: 李霞 '06/05/12 CHK: Kevin '06/05/12 APP: Kent '06/05/12	DWG NO: S/A-333 REV: A0 SCALE: 1:1 SHEET: 1 of 1