


REV.	ECN NO	LOCATIONS	DESCRIPTION	DATE	REVISER	APPD

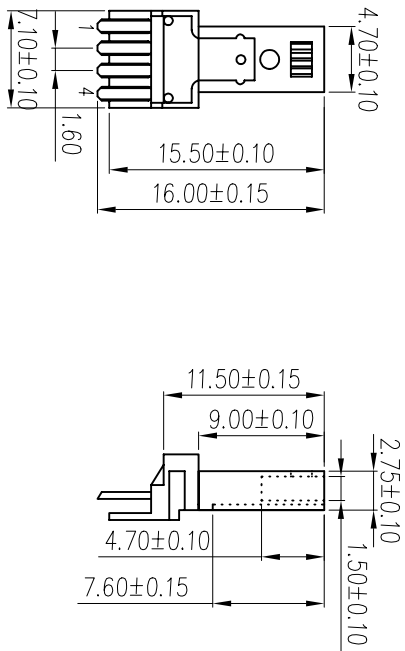

Note:

1.Material:


- 1.1 Insulator: P.B.T UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.20mm.
- 1.3 Shell: Brass,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mΩ Max.
- 2.4 Insulation resistance: 1000 MΩ Min at DC 500V.
- 2.5 Temperature range: -55°C~+105°C

3.Finishes:

- 3.1 Contacts:Gold flashed 1u",3u",5u",10u",15u",30u".
- 3.2 Shell:Nickel Plated.

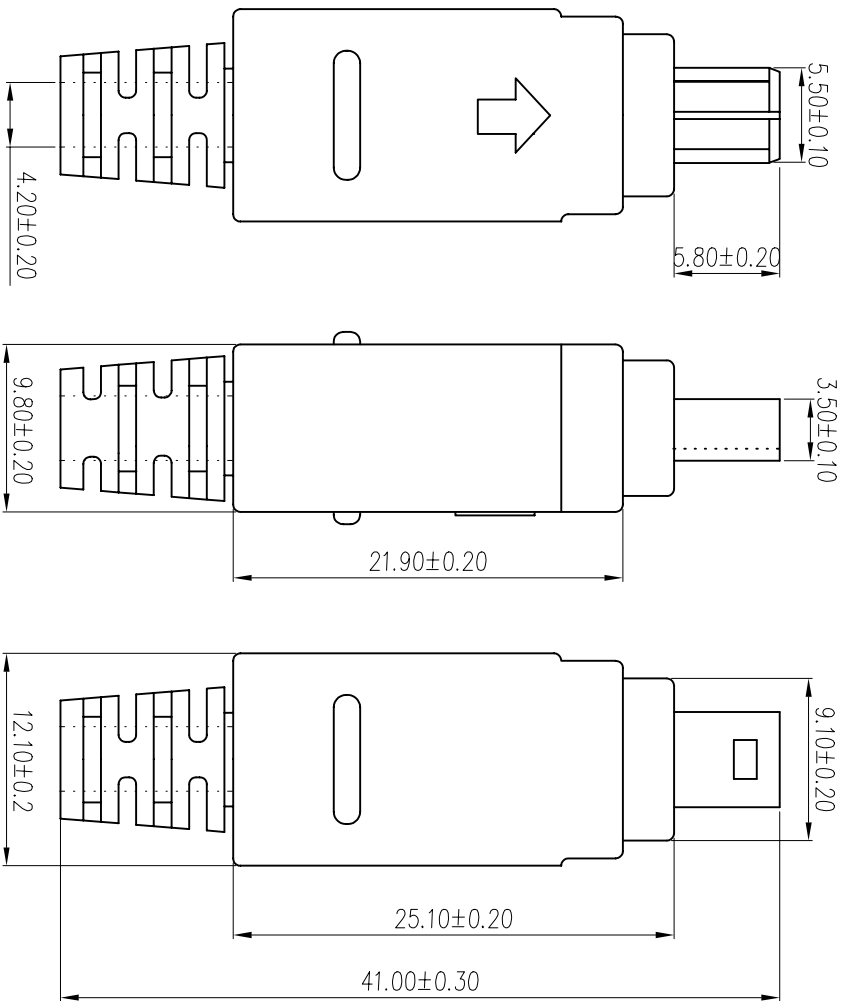

No.	Name	Qty	Material	Remarks & Thickness	Finish
5	Hood	1	P.B.T	UL 94-V0	Black
4	Back-shell	1	Brass	T=0.30mm	Nickel Plated
3	Front-shell	1	Brass	T=0.30mm	Nickel Plated
2	Contact	4	Brass	T=0.20mm	Gold Flashed
1	Housing	2	P.B.T	UL 94-V0	Black

PART NO:		MATERIAL:		Remarks & Thickness		Finish	
MODEL NO:		FINSH:					
UNIT: mm	SIZE: A4	COLOR:		PART NAME:			
TOLERANCE UNSPECIFIED		DR: 黄义强 05/06/10		IEEE 1394-4PIN(M) ASSEMBLY SR ODØ4.2			
x ±0.3	±0.20	CHK: Song 05/06/10		DWG NO:		S/A-336	
.xx ±0.100	±0.100	APP: Kent 05/06/10		SCALE: 2:1		SHEET: 1 of 1	
ANG. ±1				REV: A0			